



AU25602T

350 Litre Toxic Substance Storage Cabinet



PBA Safety Code – AU25602T

Toxic Substance Storage Cabinet

Complies with AS/NZ 4452

350 Litre Maximum Capacity

Holds 15 x 20 Litre Drums

External Size:

1760mmH x 870mmW x 870mmD

Internal Size:

1520mmH x 785mmW x 785mmD

Sump Size:

150mmH x 785mmW x 785mmD

Sump Capacity: 92 Litres

Supplied with three shelves as standard.

Extra metal shelves may be added.

Product Code: AU25909

FM Approved

(Factory Mutual Insurance Endorsement)

All Justrite Storage Cabinets are manufactured to comply fully with the relevant Australian Standards.

Powder Coat paint finish provides a superior high gloss finish which minimizes the effects of corrosion and humidity. The durable finish can withstand the abrasive type of abuse as other types of finishes.

Locking Mechanism, the three-point locking with fail safe closing mechanism. The locking bars are specially developed to avoid bending and distortion providing a distinct locking effect. The locking mechanism also has an option to padlock the cabinet as well.

All cabinets are fitted with self-closing sequential closing doors allowing the left door to close, followed by the right door. This then provides a seal around the doors.

Full length door piano hinge provides a durable sealed barrier to cabinets contents. Adjustable leveling feet at all four corners.

Shelving design permits the ventilation throughout the cabinet and troughs in each shelf collects spills and directs these away from contaminating products stored on the lower shelves. Shelves are adjustable in increments of 76mm.

Each cabinet is provided standard with a 150mm deep fully sealed sump to contain spills or leaks within the cabinet.

Self-closing mechanism is housed in the roof of the cabinet. This provides additional area within the cabinet for storage and avoids damage and alignment disorder. The cabinet closure mechanism is easily adjusted by removal of the four self-tapping screws securing the roof.

Dual vents are provided with built in flash arresters. Where applicable hazardous vapours may be piped away.


Double wall thermal barrier. 1.2mm steel thickness with 40mm air wall spacing.

Most cabinets are available ex stock to meet your requirements.


10 Year Manufacturing Warranty

Available from




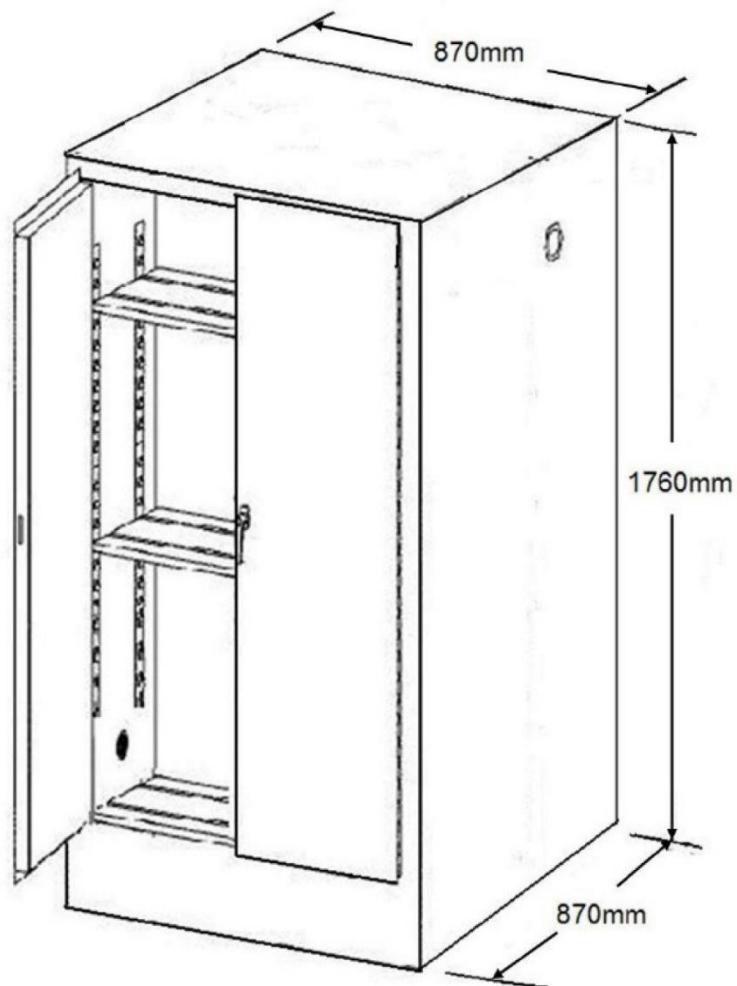

Left Side Vent Position

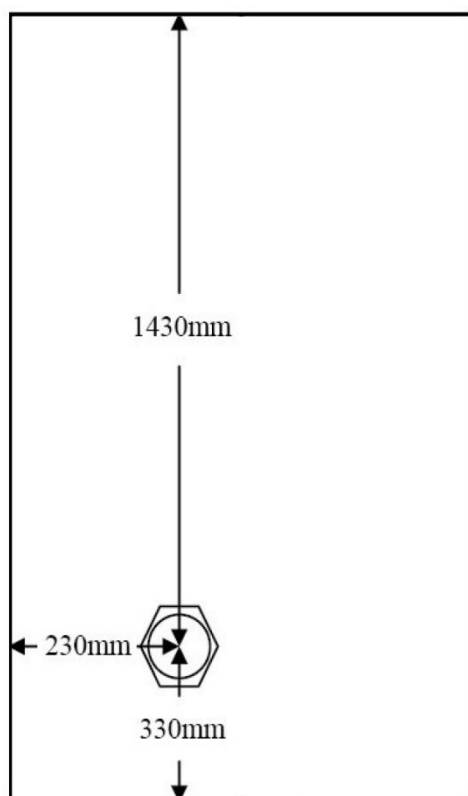

Right Side Vent Position

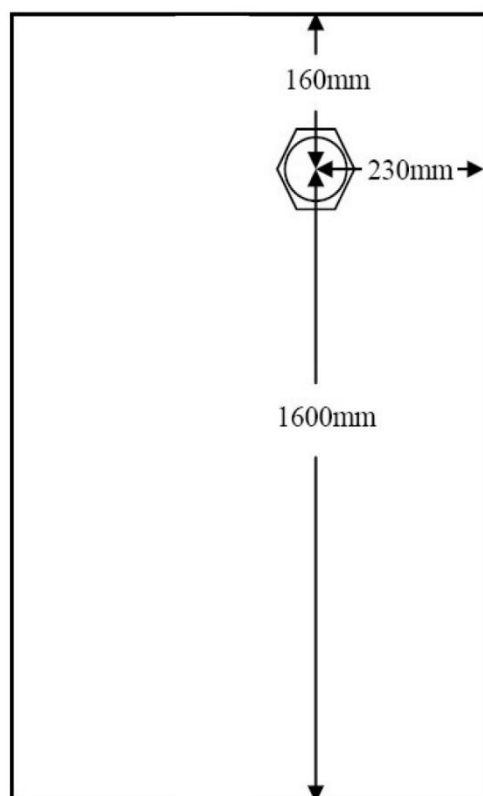

Base of Cabinet Ground Level