

3M™ Spraying/ Painting Respirator Kit 6851 A1P2

Technical Data Sheet

Description

A convenient respiratory kit designed for certain painting* and spraying environments.

The kit comes complete with the 3M™ Full Face Reusable 6000 Series Respirator for comfort and durability. The respirator is simple and easy to use, well balanced and provides a wide field of vision.

Specifications

- Filter Rating: A1P2
- Provides protection against dusts, mists and fumes – all particulates.
- Weight: 6051 filter = 100gm per pair of filters
6051/5925/501 = 115gm per pair of filters




Kit Contains:

- 1 x 3M™ Full Face Respirator 6000 Series (available S, M & L sizes)
- 1 x pair of 3M™ Organic Vapour Filters 6051 A1
- 1 x box (5 pairs) of 3M™ Particulate Filters 5925, P2
- 1 x pair of 3M™ Filter Retainers, 501
- 1 x 3M™ No-Touch™ Foam Earplugs P2000, Class 4 (SLC80: 25dB)
- 1 x 3M™ Respiratory Protection Guide
- All in a handy storage container

Applications

- Paint* spraying
- Pesticide spraying
- Chemical handling of organic vapours e.g. from thinners and adhesives
- Fibreglassing
- Printing
- Furniture manufacturing
- When requiring combined face, eye and respiratory protection
- When a higher protection factor is required (compared with a half face respirator)
- Possible to convert respirator to dual air supplied respirator system

Note: Gas/vapour cartridges do not filter particulates. If there is exposure to particulates use a combination of filters for protection. For example: fit the 3M™ Particulate Filters 5925 (P2) and the 3M™ Filter Retainer 501 over the gas/vapour cartridge to provide combined protection against dusts, mists and fumes as well as the rated gas/vapour (refer to picture below) which come in this kit.

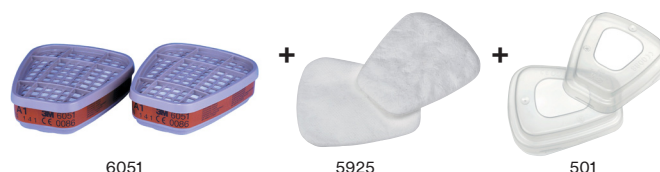

Materials

The following materials are used in this product:

- Filter Body - Polystyrene
- Gas/Vapour Filter element - Activated Carbon
- Particulate Filter Element - Fibreglass

Standards

- Complies with AS/NZS 1716:2012 (Respiratory protective devices).
- Use in accordance with AS/NZS 1715 (Selection, use and maintenance of respiratory protective equipment).
- Complies with AS/NZS 1337:1992 –High Impact protection

Fitting Instructions

Only new, unused filters from their original packaging should be fitted to your facepiece. Ensure that both filters are of the same type and class.

- A. Align 6098 filter notch with facepiece 3M logo and push together.
- B. Turn filter 1/4 turn clockwise to stop.
Discard and replace both filters at the same time.
- C. To remove filter, turn 1/4 turn anticlockwise

Disposal

Dispose in accordance with local and national regulations appropriate to the contaminants captured.

Low boiling point organic compounds are capable of migrating through 3M 6098 filters when not in use.

Technical Specifications

When selected and used in accordance with the standard (AS/NZS 1715) and for the contaminants specified, the Respirator Kit is capable of providing the following protection with a 3M Full

Face Respirator 6000 Series:

- 3M™ Organic Vapour Filters 6051 A1, for concentrations of organic vapours with boiling points >65°C up to 50 x WES or 1000 ppm, whichever is lower and exposures less than the relevant IDLH (Immediately Dangerous to Life and Health) value
- 3M™ Particulate Filters 5925, P2 for particles, for airborne concentrations up to 50 x WES.

Warning and Limitations

Particular attention should be given to warning statements where indicated. Proper selection, fit, training, use and appropriate maintenance are essential in order for the product to help protect the wearer from certain airborne contaminants. Failure to follow all instructions on the use of these respiratory protection products and/or failure to properly wear the complete product during all periods of exposure may adversely affect the wearer's health, lead to severe or life threatening illness or permanent disability.

Always be sure that the complete product is:

- Suitable for the application;
- Fit tested and fitted correctly;
- Worn during all periods of exposure;
- Replaced when necessary.

For suitability and proper use follow local regulations, refer to all information supplied or contact an occupational hygienist, safety professional or 3M representative on the Tech Assist Helpline - Australia 1800 024 464 or New Zealand 0800 364 357.

Use this respirator system strictly in accordance with all User Instructions:

- Do not submerge the filters in liquid.
- Do not use in atmospheres containing less than 19.5% oxygen. (3M definition. Individual countries may apply their own limits on oxygen deficiency. Seek advice if in doubt).
- Do not use these products in pure oxygen or oxygen enriched atmospheres.
- Do not use for respiratory protection against atmospheric contaminants and concentrations which have poor

warning properties or are unknown or immediately dangerous to life and health (IDLH) or against contaminants/concentrations which generate high heats of reaction with chemical filters.

- Do not use in airborne concentrations above those specified in **Technical Specifications**.
- Leave the contaminated area immediately if:
 - o Any part of the system becomes damaged.
 - o Airflow to the face piece decreases or stops.
 - o Breathing becomes difficult or increased breathing resistance occurs.
 - o Dizziness or other distress occurs.
 - o You smell or taste contaminants or irritation occurs.
- Never alter, modify or repair this device.
- These products do not contain components made from natural rubber latex.

NOTE: Save all user instructions for continuing reference.

Shelf Life, Storage and Transportation

1) 3M™ Organic Vapour Filters 6051 A1

Keep stored in the packaging provided in clean, dry conditions away from direct sunlight, sources of high temperature, petrol and solvent vapours. Do not store outside the temperature range -10°C to +50°C or with humidity above 90%. When stored as stated, the expected shelf life is 5 years from date of manufacture.

Before initial use, always check that the product is within the stated shelf life. When storing or transporting this product use original packaging provided.

Storing the filters in an airtight container will help prolong the service life by reducing exposure to moisture and contaminants.

As per AS/NZS1715:2009 Section 4.2.5.3, "All classes of gas filter shall be discarded no longer than six months after opening, irrespective of the number of periods of use".

2) 3M™ Particulate Filters 5925, P2

The filters should be stored in the packaging provided in dry, clean conditions away from direct sunlight, sources of high temperature, petrol and solvent vapours.

Do not store outside the temperature range -10°C to +50°C or with humidity above 90%. When stored as stated, the expected shelf life is 5 years from date of manufacture.

End of shelf life date is marked on the product packaging. Before initial use, always check that the product is within the stated shelf life. When storing or trans-orting this product use original packaging provided.

3M™ Full Face Respirator 6000 Series

Keep stored in the packaging provided in clean, dry conditions away from direct sunlight, sources of high temperature, petrol and solvent vapours. Do not store outside the temperature range -10°C to +50°C or with humidity above 90%. When stored as stated, end of shelf life (use-by) date of the product is shown on the packaging.

Before initial use, always check that the product is within the stated shelf life. When storing or transporting this product use original packaging provided.

Additional Information

3M™ Organic Vapour Monitor 3500 and 3520

3M™ Organic Vapour Monitors are simple and effective personal sampling badges. The monitor captures a wide range of airborne organic vapours, enabling a laboratory to analyse and identify the type and level of exposure to the worker.



The airborne concentrations measured can be used as part of a risk management process to institute suitable controls, including assisting in determination of the type and service life of respiratory equipment appropriate to the contaminants (according to AS/NZS1715).

For more information, please contact 3M and request a copy of the 3M™ Organic Vapour Monitor 3500 and 3520 Tech Data Sheet.

3M™ Select & Service Life Software

3M have designed software to help you estimate how frequently certain 3M™ Gas and Vapour Cartridges should be replaced. You can then use this information to establish a cartridge change schedule. You will firstly need information on the chemical contaminants in your working environment

For more information contact your 3M representative or call the 3M TechAssist Helpline:

3M Australia: 1800 024 464

3M New Zealand: 0800 364 357

Important Notice

To the extent permitted by law, 3M shall not be liable for any loss or damage including any loss of business, loss of profits, or for any indirect, special, incidental or consequential loss or damage arising from reliance upon any information herein provided by 3M. The user is responsible for determining the suitability of the product for its intended use. Nothing in this statement will be deemed to exclude or restrict 3M's liability for death or personal injury arising from its negligence.

Ordering Information

3M Code	Model #	Description
AT010602608	6851	A1P2 spray/paint full face respirator kit small
AT010614173	6851	A1P2 spray/paint full face respirator kit medium
AT010614181	6851	A1P2 spray/paint full-face respirator Kit large



Available from

