## PRATT COMBINATION 304SS SHOWER WITH EYE WASH & BOWL & FOOT TREADLE - FLIP TOP LID

#### **COMPLIANCE**

All PRATT emergency showers, and eye wash stations are designed and manufactured in an ISO 9001 accredited facility, with full conformance to both AS4775 and ANSI Z358.1 standard.

**AEROSTREAM** technology delivers a gentle cascade of soft flow water to flush away any hazardous materials from the eyes and face.

**SWIRLTECH** technology delivers a precise pattern and controlled flow rate of a large volume of flushing fluid, ensuring optimum decontamination when it's needed most.

**FCR/FCA** all showers and eyewashes come standard with Flow Control Regulators and/or Flow Control Adjuster. The shower FCR assists for simultaneous flow between the shower and eyewash to ensure minimum flow outputs are not compromised. The eyewash incorporates our FCA, allowing for the fine tuning of flow output.

#### **FEATURES**


- Shower stanchion and fittings are 304SS
- 304 Stainless Steel Shower Head
- 304 Stainless Steel Eye Wash Bowl
- Hand and Foot Operated via Push Handle, Foot Treadle and Pull Rod
- Stainless Steel Eyewash assembly with Plastic Dust Caps
- Flip Top Lid for dust protection

#### **OPTIONAL ACCESSORIES**

- Emergency Shower and/or Eyewash Signs
- Alarm Kits
- Lighting
- Thermal Insulation
- Anti-Scald and Anti-Freeze Valves
- Shower Test Kit
- Custom modification where applicable



# PRATT COMBINATION 304SS SHOWER WITH EYE WASH & BOWL & FOOT TREADLE - FLIP TOP LID

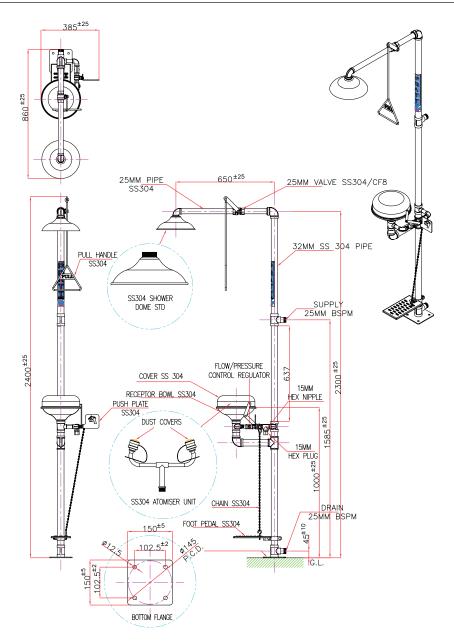

TECHNICAL INFORMATION	
INLET CONNECTION	25mm BSPM
WATER SUPPLY-LINE SIZE	25mm *Must be hydraulically sized to meet requirements.
OUTLET CONNECTION	25mm BSPM
MINIMUM PERFORMANCE REQUIREMENTS	210kPa / 30PSI *Caution should be taken when pressure exceeds 550 kPa
FLOW OUTPUT (AT MIN PERFORMANCE REQUIREMENT)	Shower 80 LPM Eye Wash 15 LPM Eye-Face Wash 30 LPM
WEIGHT(KG)	22
DIMENSIONS(CM)	79 X 30 X 35

Installation of emergency showers, eye and eye/face wash equipment shall be in accordance with AS/NZS4775 or ANSI Standard Z358.1 - whichever is applicable to the installation. PRATT Safety advises due to ongoing research and development, specifications may change without notice.



### **SPARE PARTS**

